




High Pressure Resistant

5YR
Warranty



MODEL 15W-L10-230V-W DATA SHEET
WHITE LED STRIP WITH SILICONE EXTRUSION

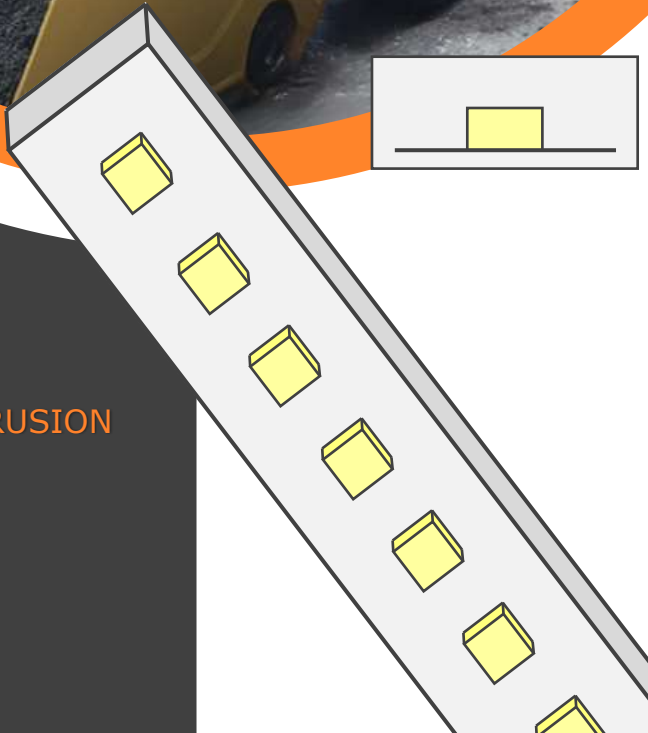


20 CABLE TIES



20 ISOLATING CLIPS



AC CONNECTOR

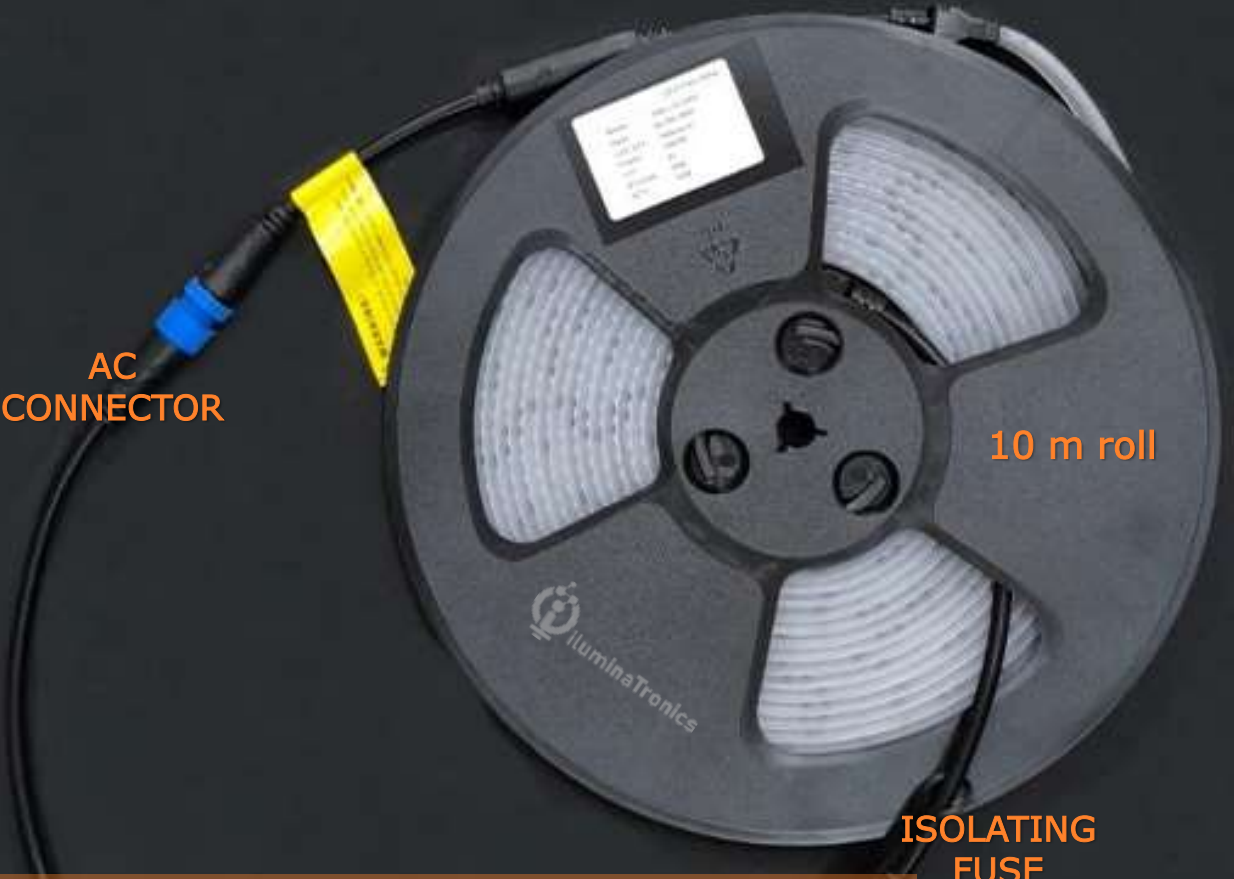

10 m roll

ISOLATING FUSE



LED STRIP KIT
MODEL 15W-L10-230V-W



WHITE LED STRIP SPECIFICATIONS

MODEL 15W-L10-230V-W


WHITE LED STRIP DATA	MODEL: 15W-L10-230V-W
ELECTRICAL	
Input voltage	230 VAC 50/60 Hz
Supply voltage range	200 to 260 VAC 50/60 Hz
Current draw	0.7 A
Power factor (PF)	0.9
Power consumption per meter	15 W/m
Total set power	150 W
LED density	144 LEDs/m
LED package type	SMD 2835
PHOTOMETRICS	
Illuminance at 4 m mounting height	180-200 lux
Luminous flux (lm)	1850 lm/m
Correlated color temperature (CCT)	White light 6000 K (optional warm white 3500 K)
Color rendering index (CRI)	>80
Beam angle	120°
Photometric files	IES file
TEMPERATURE AND OPERATING CONDITIONS	
Ambient operating temperature	-45°C to +50°C
Maximum test-point temperature	75°C
SERVICE LIFE	
Typical service life	>5 years
Service life in 24/7 operation	3 years
Rated LED strip life	>50,000 h
Estimated maintenance savings	>20% per year
CERTIFICATIONS AND STANDARDS	
Compliance markings	CE / TÜV / ROHS / NOM
LED strip ingress protection	IP68
Connector ingress protection	IP68
Connectors	Factory-fitted
Outer jacket	Halogen-free food-grade silicone
Flame-retardant	Yes
Overvoltage protection	Yes
Overtemperature protection	Yes
Isolator fuse	Yes
Compression resistance	Yes
Tensile strength	50 kg



WHITE LED STRIP SPECIFICATIONS

MODEL 15W-L10-230V-W

WHITE LED STRIP DATA	MODEL: 15W-L10-230V-W
PRODUCT DIMENSIONS	
Length	10 m roll
Connection configuration	Individual 10 m sections or linkable up to 50 m in series
LED strip dimensions	4 mm high x 14 mm wide
Cable cross-section	2 x 1 mm
Cable voltage rating	300/500 V
Weight per 10 m roll	1.35 kg
Included mounting accessories	Yes
LOGISTICS	
LED strip part number	15W-L10-230V-W
Master carton contents	10 rolls of 10 m
Box dimensions (length x width x height)	40 x 40 x 30 cm
Gross box weight	14 kg
Volume	0.048 m3
Unit packaging	PVC zip bags
Master carton packaging	Cardboard box wrapped with stretch film

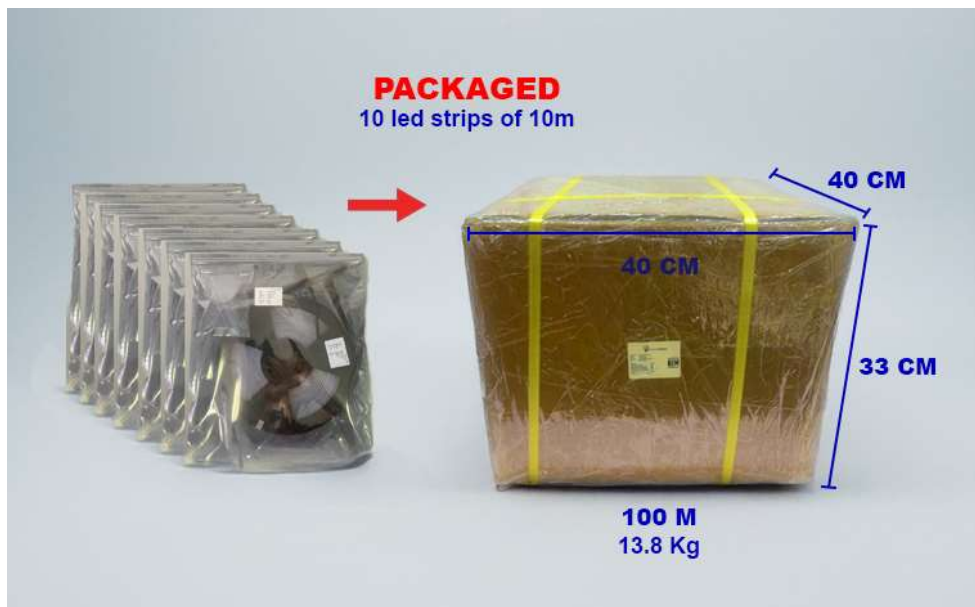



iluminatronics



5YR
Warranty



www.iluminatronics.com
United States of America

1211 San Dario Ave. #2068, Laredo, TX 78040 USA
sales@iluminatronics.com
Tel. USA: +1-941-893-2696

